## REVISIONS

| REV | DESCRIPTION | DR | CHK | DATE | ECR/ESR NO. |
|---|---|---|---|---|---|
| 01 | CHANGE 48337 DOWEL TO 49054 | BP | PS | 02/12/02 | EALT-53ZGQ4 |









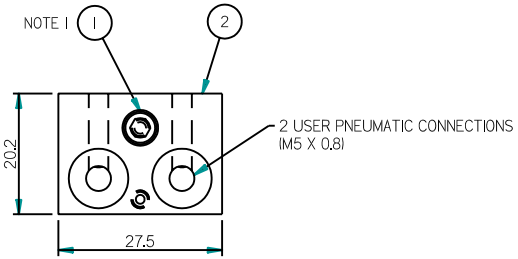


MXC20EM-T-P-02M5
WEIGHT
.018 kg

APPROVED FOR PRODUCTION
Print Date
05/25/2000

| ITEM | QTY | ARI PART NO. | DESCRIPTION |
|---|---|---|---|
| 3 | 1 | 49054 | DOWEL PIN |
| 2 | 1 | 0003-C76N | BLOCK, TOOLING |
| 1 | 1 | 89503-P1045 | SCR, SOC HD CAP |

BILL OF MATERIALS

NOTES:
1. APPLY ANTI-SEIZE LUBE, ARI# 83908-P1116.

THIRD ANGLE PROJECTION

THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF APPLIED ROBOTICS INC. THE INFORMATION IN THE DOCUMENT/FILE IS SUBJECT TO CHANGE WITHOUT NOTICE.APPLIED ROBOTICS MAKES NO WARRANTY OF ANY KIND WITH REGARD TO THIS DOCUMENT/FILE. INCLUDING, BUT NOT LIMITED TO IMPLIED WARRANTIES OR FITNESS FOR A PARTICULAR PURPOSE. APPLIED ROBOTICS INC. SHALL NOT BE LIABLE FOR ANY ERRORS CONTAINED HERE IN OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE PERFORMANCE OR USE OF THIS DOCUMENT/FILE.

METRIC

TOLERANCES UNLESS OTHERWISE SPECIFIED

DECIMAL (MILLIMETER)
.X = ± .25
.XX = ± .12
ANGLES = ± 1/2
SURFACE FINISH = 1.6

MAT'L:

SURFACE TREATMENT:

3D ISO 9001 REGISTERED

DR N JACOBSON 5/12/00
CHK J. V. 5/19/00
ENG N JACOBSON 5/12/00
MFG D.S. 5/22/00
ISSUED J. E. 5/23/00
QC F.B. 5/22/00

SCALE: 2x

DO NOT SCALE DRAWING

DIM. AND TOLERANCING IN ACCORDANCE WITH ANSI Y14.5M-1982

Applied Robotics, Inc.
648 Saratoga Rd.
Glenville, NY 12302
Tel. (518) 384-1000
Fax. (518 384-1200

TITLE

MXC20EM-T-P-02M5
QuickConnect EXTERNAL
PNEUMATIC MODULE

SIZE C | 0003-C60A | 01